



KYT-6000 SERIES

Motor Driven Magnetic & IC Card Reader/Writer Terminal



- ISO all 3 tracks with single pass
- High speed read & write 350 mm/sec
- Encoding High Coercivity or Low Coercivity card
- RF read option
- IC Card read Option
- Compact design
- RS-232C, USB, Interface
- Ethernet Interface Option
- LCD Option **Ordering Information KYT-6ABC**

A :: MS/IC	B :: Track	C :: Option
1 : IC only	1 : ISO-1	0 : -
2 : MS-Read only	2 : ISO-2	1 : LoCo
3 : MS-R/W	3 : ISO-3	2 : HiCo
4 : MS(Read only)+IC	5 : ISO-1,2	3 : LoCo & Shutter
5 : MS(R/W)+IC	6 : ISO-1,3	4 : HiCo & Shutter
9 : Custom	7 : ISO-2,3	8pin
	9 : ISO-1,2,3	Call for other Options not listed

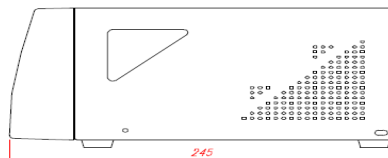

Power Requirements	Input voltage : AC 120/220V ((+-) 5%)
Power Consumption	
Motor Starting or Reversing :	Less than 250 mA
Card Feed & Reading :	Less than 280 mA
Card Feed & Writing :	Less than 450 mA
Steady state :	Less than 80 mA
Life of Head	500,000 passes
Error Rate	3/1000 cycle.
Communication	RS232, USB, Ethernet (options)
Formats read	ISO 7810, 7811/1-6, AAMVA, JIS II & custom data