


# DOC-8XX

## Card Dispenser

- Compact Size
- High Reliability
- Easy Operation
- Low Price

DOC-805: Magnetic Card ISO-7813

DOC-806: Smart Contact Card ISO-7816

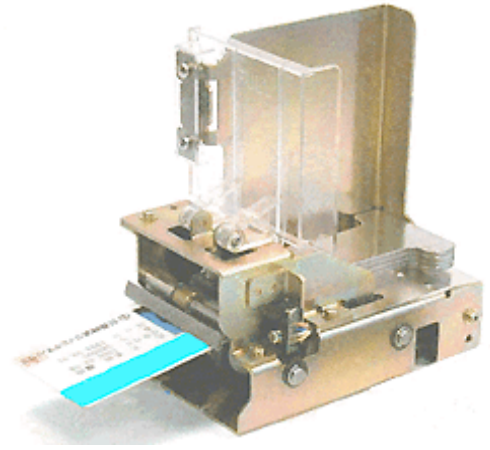

For Plastic cards conforming to ISO	ISO 7813 card, Card thickness 0.25~0.8 mm, Non-embossed
Card thickness	Approx. 200 cards
Interface	TTL
Card Capacity	Paper cards (0.27mm): 300 cards Thin plastic cards (0.45 mm): 200 cards ISO Plastic cards (0.80mm): 100 cards Chip cards (0.80mm): 100 cards
Repeat Function	Control from outside allows several re-tries at the time of card jamming
Dispensing Time	Within 1.5 sec./per card avg. (without re-try time)
Operation Environment	Temperature: -10~50°C Humidity: 5~90% (no condensation)
Dimensions	118 (W) x 128 (D) x 168.8 (H) mm (without card stacker) 2.25 kg
Power Supply	24V
Idling Current	2.4VA
Max. Power Consumption	15VA
Dimensions	92mm(W) X 142mm(H) X 133mm(L) 3.6in(W) X 5.65in(H) X 4.07in(L)
Weight	1.2kg, 42.8oz

Note : All specifications are subject to change without notice



Securetech Peripherals, Inc.,  
336 N. Gaffey Street 2<sup>nd</sup> Floor  
San Pedro, CA 90731 U.S.A.

<http://securetech-corp.com>  
sales@securetech-corp.com  
Phone : 310-547-8501, Fax : 310-521-9600