

# ST-10 if

## Smart Card Unit

- Compact-size, lightweight and high-reliability assembly type
- Autolock mechanism

### Main Applications


- Electronic Commerce
- Data search, Electronic Payment, etc.
- Home Banking

### Main Features

- High reliability ensured by fully inserted card operation with push-in/push-out mechanism.
- Low power consumption.
- Lightweight and compact size for easy, flexible installation.
- RS232C serial interface.
- Ultra low cost.



Operating method	Manual insertion, Manual ejection. Push IN/push OUT
Applicable cards	Card complying with ISO/IEC 7816 T=0, T=1
Power supply	DC5V 5mA TYP. (Excluding Smart card's current)
Operating condition	Temperature : 5°~55°C Humidity : 10~90%RH (No condensation)
Operating life	Up to 100,000 passes in normal use
Interface	RS232C
Dimensions & Weight	100 (D) x 58 (W) x 11 (H) mm, Approx. 30g

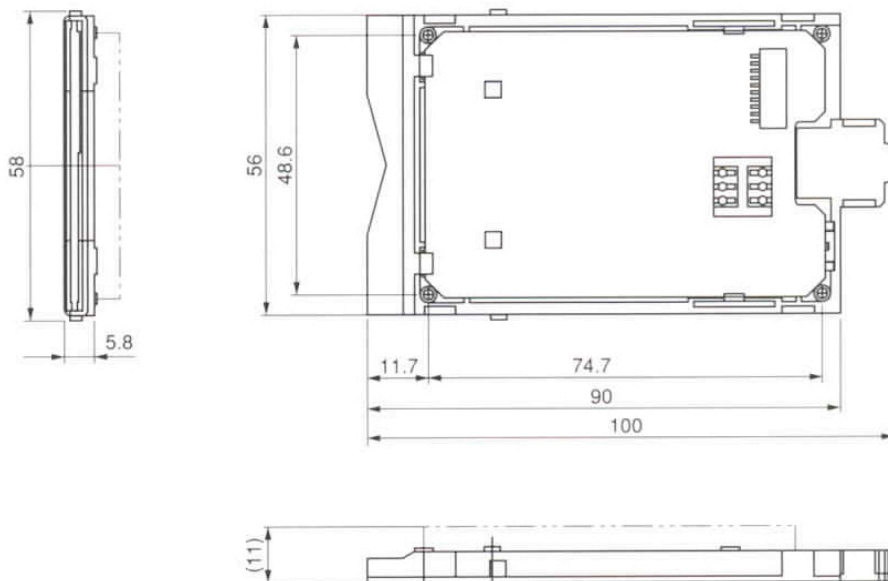

Note : All specifications are subject to change without notice



Securetech Peripherals, Inc.,  
336 N. Gaffey Street 2<sup>nd</sup> Floor  
San Pedro, CA 90731 U.S.A.

<http://securetech-corp.com>  
sales@securetech-corp.com  
Phone : 310-547-8501, Fax : 310-521-9600